


ALUMINIUM ELECTROLYTIC

LOW LEAKAGE RADIAL LEAD "RBLL"

- * Very low leakage current
- * Low impedance characteristics
- * Long life
- * Can be used as a replacement for Tantalum capacitors
- * Close capacitance tolerance

Temp range -40°C to +85°C
Leakage Current 0.002CV or 0.4uA
Tolerance ? 20 %

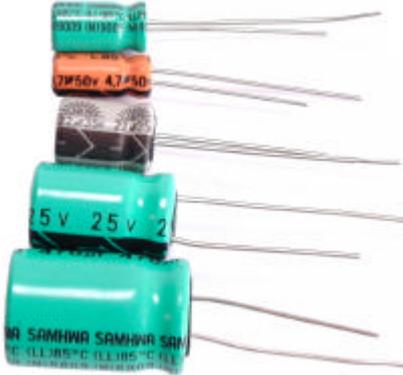


| Part Number | Value | Voltage | Size (mm) |
|-------------|-------|---------|-----------|
| RBLL1/50V | 1uF | 50V | 5 x 11 |
| RBLL2.2/50V | 2.2uF | 50V | 5 x 11 |
| RBLL3.3/50V | 3.3uF | 50V | 5 x 11 |
| RBLL4.7/50V | 4.7uF | 50V | 5 x 11 |
| RBLL10/35V | 10uF | 35V | 5 x 11 |
| RBLL10/50V | 10uF | 50V | 5 x 11 |
| RBLL22/35V | 22uF | 35V | 6.3 x 11 |
| RBLL22/50V | 22uF | 50V | 6.3 x 11 |
| RBLL33/25V | 33uF | 25V | 8 x 12 |
| RBLL47/25V | 47uF | 25V | 10 x 12 |
| RBLL47/50V | 47uF | 50V | 10 x 12 |
| RBLL100/25V | 100uF | 25V | 10 x 16 |
| RBLL220/16V | 220uF | 16V | 8 x 11.5 |
| RBLL220/25V | 220uF | 25V | 13 x 25 |
| RBLL470/16V | 470uF | 16V | 10 x 16 |

MINI RADIAL ELECTROLYTIC "RBM"

Short body length of 7mm for the demand of high density insertion in compact electronic devices, test equipment and computers.

Temp range -40°C to +85°C
Leakage Current 0.01CV or 3uA
Tolerance ? 20 %

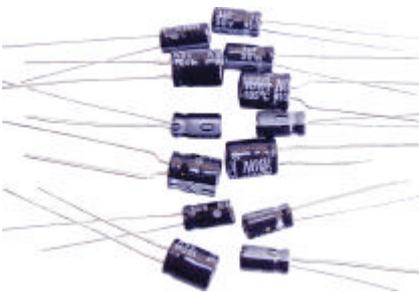


| Part Number | Value | Voltage | Size (mm) |
|-------------|--------|---------|-----------|
| RBM0.1/50V | 0.1uF | 50V | 4 x 7 |
| RBM0.47/50V | 0.47uF | 50V | 4 x 7 |
| RBM1/50V | 1.0uF | 50V | 4 x 7 |
| RBM2.2/50V | 2.2uF | 50V | 4 x 7 |
| RBM4.7/50V | 4.7uF | 50V | 4 x 7 |
| RBM10/16V | 10uF | 16V | 4 x 7 |
| RBM10/50V | 10uF | 50V | 5 x 7 |
| RBM22/25V | 22uF | 25V | 5 x 7 |
| RBM47/16V | 47uF | 16V | 5 x 7 |
| RBM47/35V | 47uF | 35V | 6 x 7 |
| RBM100/16V | 100uF | 16V | 6 x 7 |

HIGH TEMPERATURE RADIAL LEAD "KME"

High quality grade, radial lead type, ideally suited for high temperature applications.

Temp range -55°C to +105°C
Leakage Current 0.1CV +40
Tolerance ? 20 %

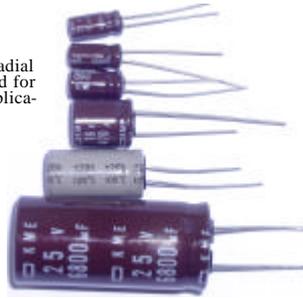


| Part Number | Value | Voltage | Size (mm) |
|-------------|-------|---------|-----------|
| KME1/50V | 1 | 50 | 5 x 11 |
| KME2.2/100V | 2.2 | 100 | 5 x 11 |
| KME4.7/50V | 4.7 | 50 | 5 x 11 |
| KME10/50V | 10 | 50 | 5 x 11 |
| KME10/400V | 10 | 400 | 12 x 25 |
| KME22/50V | 22 | 50 | 5 x 11 |
| KME22/400V | 22 | 400 | 16 x 25 |
| KME47/25V | 47 | 25 | 5 x 11 |
| KME47/400V | 47 | 400 | 18 x 31.5 |
| KME100/25V | 100 | 25 | 6.3 x 11 |
| KME100/35V | 100 | 35 | 8 x 11.5 |
| KME100/63V | 100 | 63 | 10 x 12.5 |
| KME470/16V | 470 | 16 | 10 x 12.5 |
| KME470/35V | 470 | 35 | 10 x 20 |
| KME1000/25V | 1000 | 25 | 12.5 x 20 |
| KME1000/35V | 1000 | 35 | 12.5 x 25 |
| KME2200/16V | 2200 | 16 | 12.5 x 25 |
| KME2200/25V | 2200 | 25 | 16 x 25 |
| KME4700/35V | 4700 | 35 | 18 x 40 |
| KME6800/25V | 6800 | 25 | 18 x 40 |

LOW IMPEDANCE RADIAL LEAD "LXV"

Low impedance, High reliability grade, radial lead type, suited for high temperature applications.

- * Low impedance at high frequency
- * Load life 105°C 2,000 - 5,000 hours assured

Temp range -55°C to +105°C
Leakage Current 0.01CV or 3uA
Tolerance ? 20 %

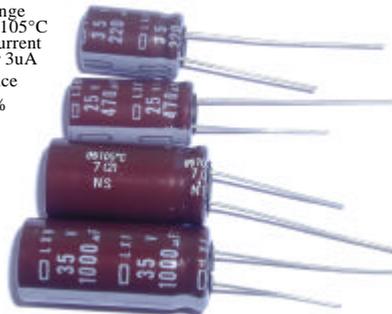


| Part Number | Value | Voltage | Size (mm) |
|-------------|--------|---------|------------|
| LXV100/25V | 100uF | 25V | 6.3 x 11.5 |
| LXV120/25V | 120uF | 25V | 6.3 x 15 |
| LXV120/50V | 120uF | 50V | 10 x 16 |
| LXV150/25V | 150uF | 25V | 8 x 12 |
| LXV220/35V | 220uF | 35V | 8 x 20 |
| LXV220/50V | 220uF | 50V | 10 x 25 |
| LXV470/16V | 470uF | 16V | 10 x 16 |
| LXV470/25V | 470uF | 25V | 10 x 20 |
| LXV470/50V | 470uF | 50V | 12.5 x 25 |
| LXV1000/25V | 1000uF | 25V | 12.5 x 25 |
| LXV1000/35V | 1000uF | 35V | 16 x 20 |
| LXV1000/50V | 1000uF | 50V | 16 x 30 |
| LXV2200/16V | 2200uF | 16V | 12.5 x 30 |
| LXV2200/25V | 2200uF | 25V | 12.5 x 40 |
| LXV2200/35V | 2200uF | 35V | 16 x 35 |
| LXV4700/16V | 4700uF | 16V | 16 x 35 |
| LXV4700/25V | 4700uF | 25V | 18 x 40 |

BIPOLAR "RBP"

Specially designed non-polarized electrolytic capacitors suited for circuits with reversing Polarity.

Temp range -40°C to +85°C
Tolerance ? 20 %

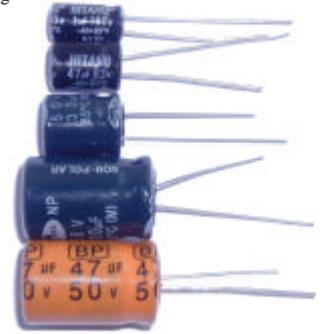


| Part Number | Value | Voltage | Size (mm) |
|-------------|-------|---------|-----------|
| RBP1/50V | 1.0uF | 50V | 8 x 11 |
| RBP1/160V | 1.0uF | 160V | 8 x 11 |
| RBP2.2/50V | 2.2uF | 50V | 8 x 11 |
| RBP4.7/50V | 4.7uF | 50V | 8 x 11 |
| RBP6.8/50V | 6.8uF | 50V | 8 x 11 |
| RBP10/50V | 10uF | 50V | 10 x 11 |
| RBP22/50V | 22uF | 50V | 10 x 11 |
| RBP33/50V | 33uF | 50V | 10 x 11 |
| RBP47/50V | 47uF | 50V | 13 x 21 |
| RBP100/50V | 100uF | 50V | 16 x 27 |

ELECTROLYTIC LUG TERMINAL "RG"

RG Series are suited for use in amplifiers, power supplies or any circuit that requires a high degree of filtering. These capacitors have low leakage current, low power loss and long storage and operating life.

Temp range -40°C to +85°C
Tolerance ? 20 %

Complete with mounting clip.

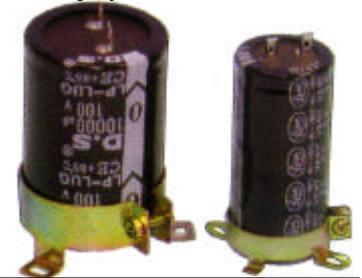

| Part Number | Value | Voltage | Size (mm) |
|--------------|----------|---------|-----------|
| RG4000/63V | 4,000uF | 63V | 30 x 50 |
| RG8000/63V | 8,000uF | 63V | 35 x 63 |
| RG10000/50V | 10,000uF | 50V | 30 x 50 |
| RG10000/100V | 10,000uF | 100V | 40 x 100 |

COMPUTER GRADE "LB"

LB Series are suitable as power source filters for computers, inverters, high current power supplies, high output power amplifiers and control equipment.

Complete with mounting clip.

Temp range -25°C to +85°C
Tolerance -10% - +50%



| Part Number | Value | Voltage | Size (mm) |
|-------------|----------|---------|-----------|
| LB10000/25V | 10,000uF | 25V | 40 X 30 |
| LB15000/35V | 15,000uF | 35V | 40 x 45 |
| LB22000/25V | 22,000uF | 25V | 40 X 71 |
| LB33000/25V | 33,000uF | 25V | 40 X 71 |
| LB47000/25V | 47,000uF | 25V | 40 X 80 |
| LB68000/16V | 68,000uF | 16V | 40 x 90 |